


Sonic Sentinel Tripod Leg Extension Kit Installation

The Sonic Sentinel Tripod Leg Extension Kit (p/n 00020) elevates the Model 14-1 Propane Sound Cannon above tall vegetation or other obstacles. Each kit increases leg length by 24 inches and cannon height by 20.75 inches. Installation is accomplished according to the following instructions:

Installation Instructions:

1. Power down cannon via the external power switch (down position) and disconnect the propane tank. Allow cannon to sit for 30min to discharge any remaining gas.
2. Using the included 6mm wrench, loosen the tripod's barrel clamp and remove the Model 14-1 cannon from the tripod.
3. Collapse the tripod and lay it on a suitable, flat work surface.

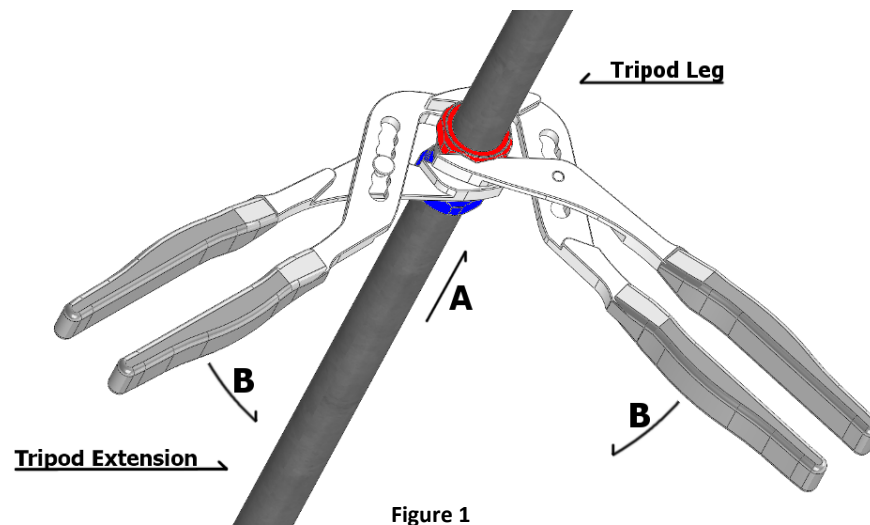

4. Fig. 1, A: Slide the first extension's coupler onto any of the tripod's 3 legs. Press firmly to ensure the leg is completely seated inside the extension coupler.
5. Fig. 1, B: Using 2 pair of channel locks, large pliers, or adjustable wrenches, snugly tighten the extension coupler's upper lock ring (Fig. 1, Red). Note: The lower lock ring (Fig. 1, Blue) is pre-tightened at the factory.
6. Repeat steps 4 and 5 for the remaining two leg extensions.
7. Extend tripod in the desired location, reinsert the Model 14-1 cannon, then install and reconnect the propane tank. The elevated Model 14-1 cannon is now ready for use.